



RPE Srl
Leader in Fluid Management Control

100%
MADE IN ITALY

Series RD Vent

www.rpesrl.it



RD Vent Series

100%
MADE IN ITALY

2



from 1972

•RPE Srl is a **worldwide reference in the solenoid valve, pressure restrictor, filter and flow meter industry**, thanks in great part to the technology we have developed and the continuous evolution of international food and electrical certifications.

•**Founded in 1972** through the conception of our current President (Mr. Giuliano Ravazzani), who had the vision and drive to create one of the most successful and reputable solenoid valve manufacturers in the world.

•.

Today RPE designs and develops every component for all the solenoid valves we manufacture and offer. RPE products have been **sold and distributed in Italy and around the world for over 40 years.**



RD Vent Series

100%
MADE IN ITALY

3



- Quality comes first: **RPE is ISO 9001:2015 certified**
- Each product family complies with food and electrical quality certification such as: UL, EN60335, WRAS, ACS, NSF, KTW, D.M.174/2001

- RPE's products are 100% made in Italy.
- All our products are designed and manufactured in our state-of-the-art factory in Carbonate (Milan) Italy.






RD Vent Series

100%
MADE IN ITALY

4

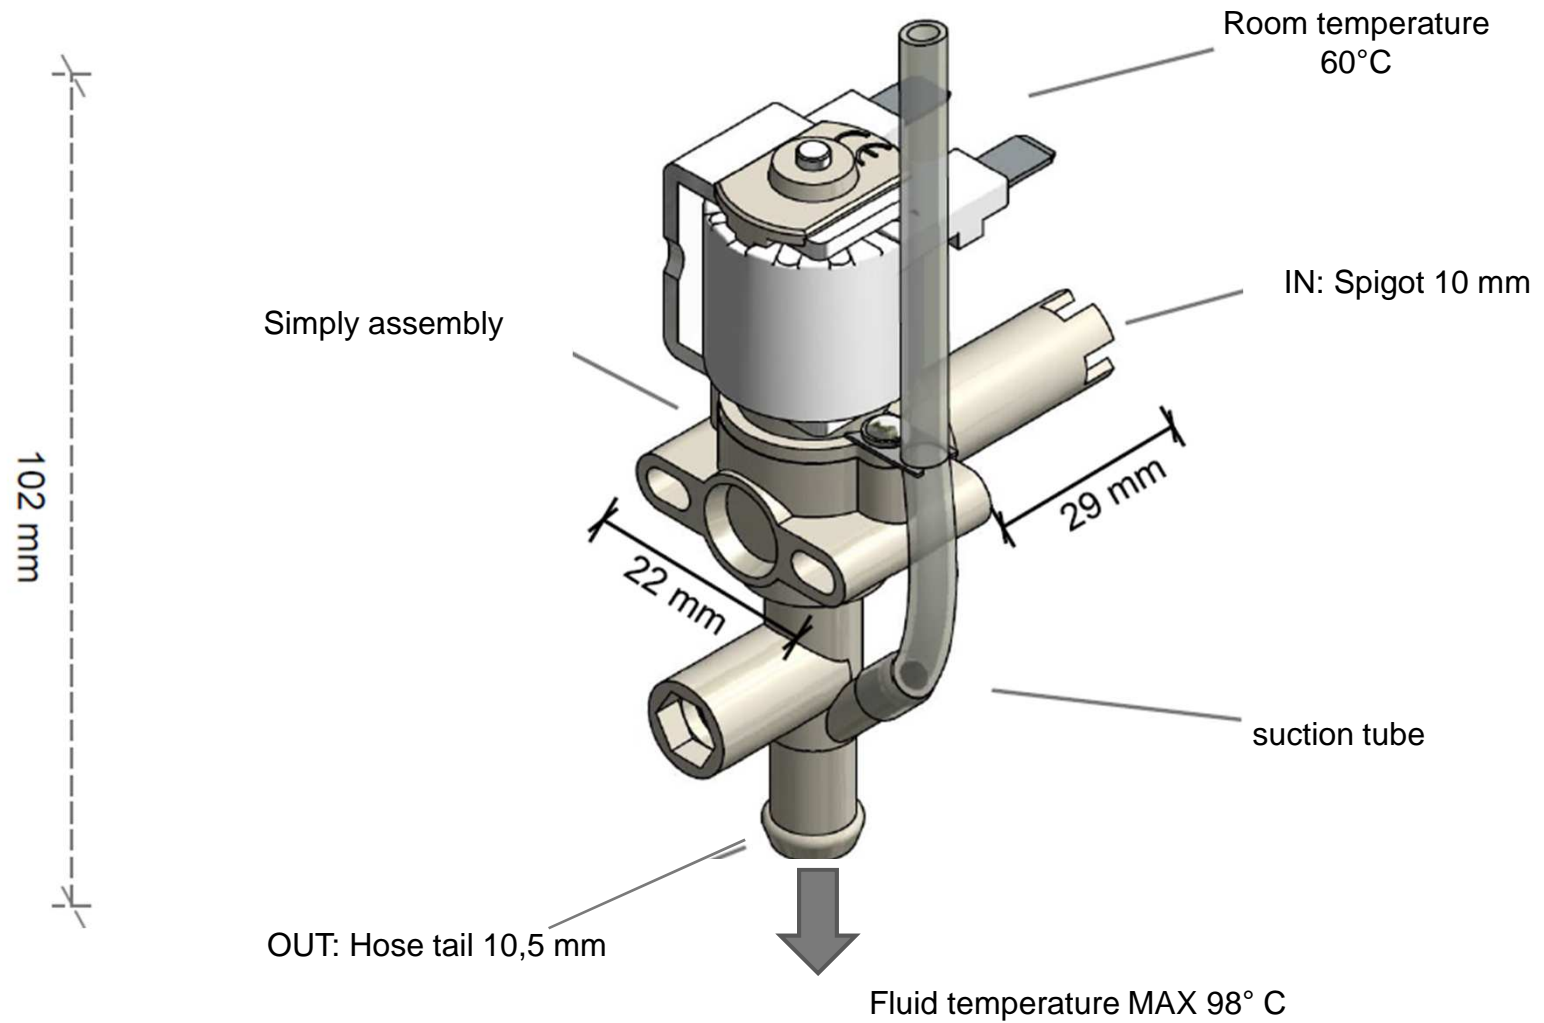




RD Vent Series

100%
MADE IN ITALY

5

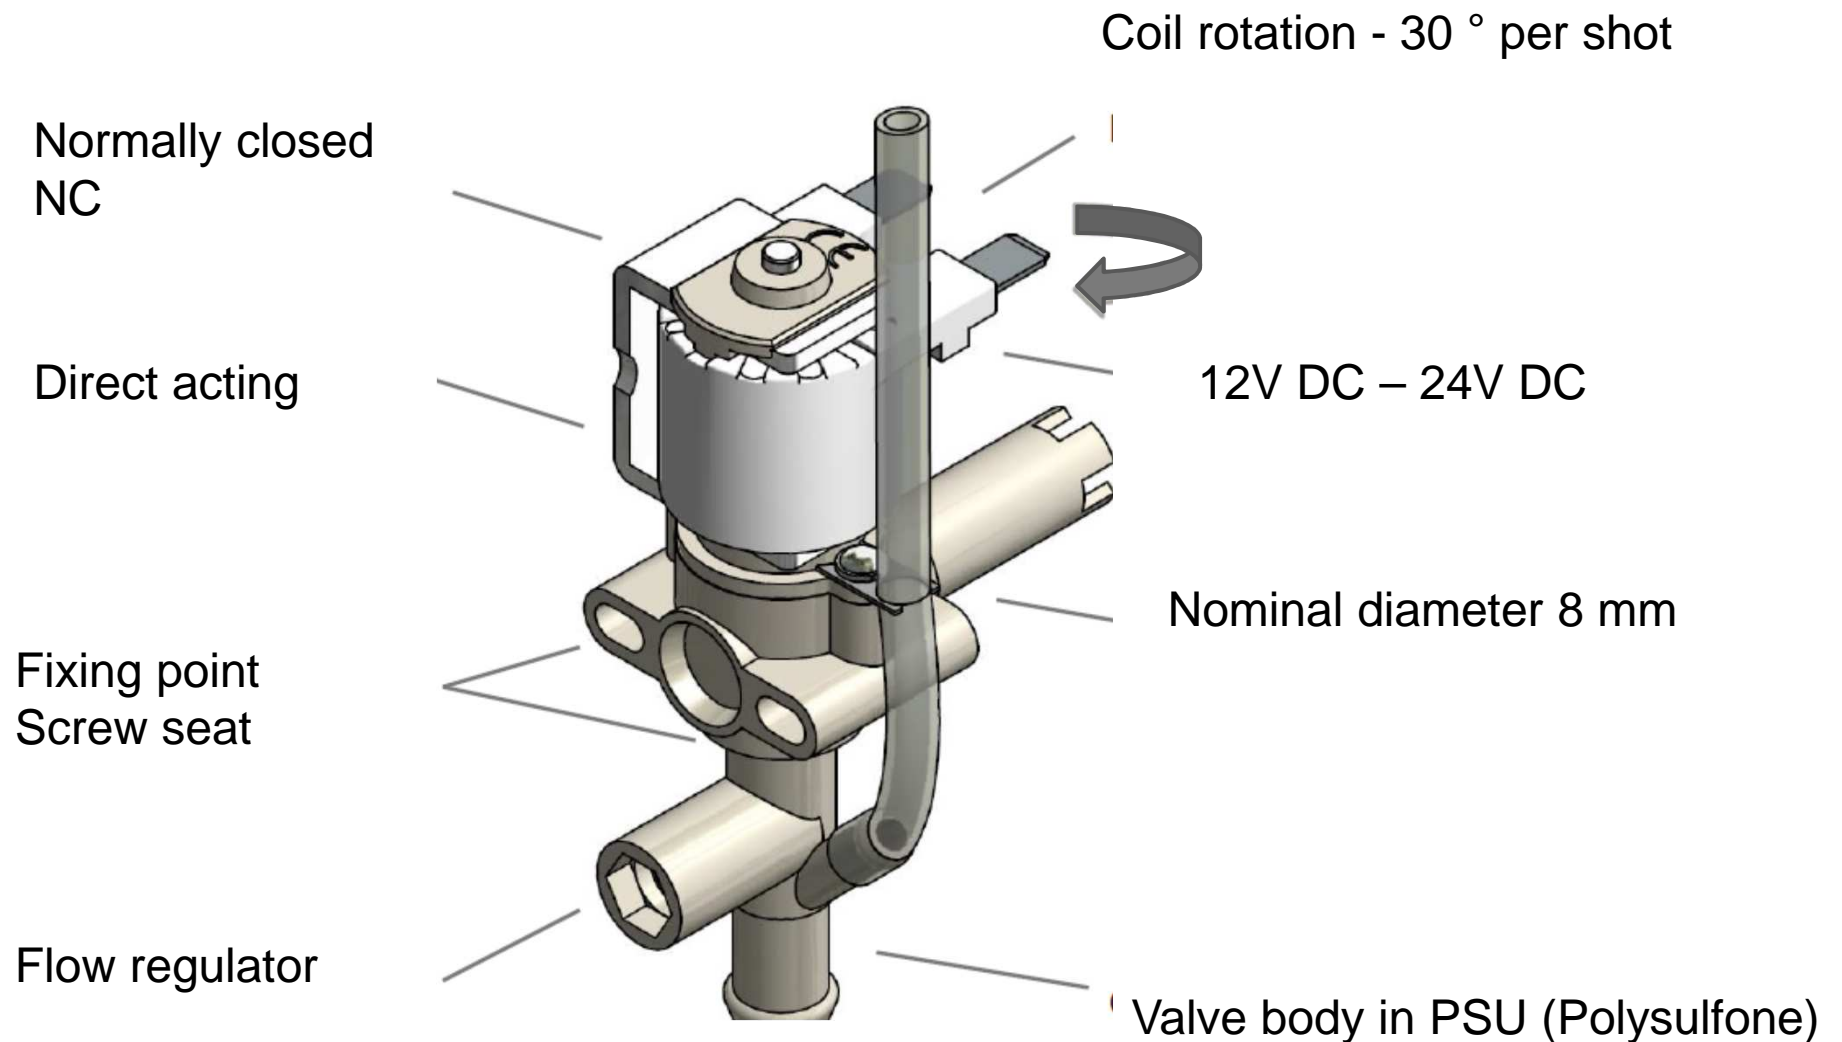




RD Vent Series

100%
MADE IN ITALY

6

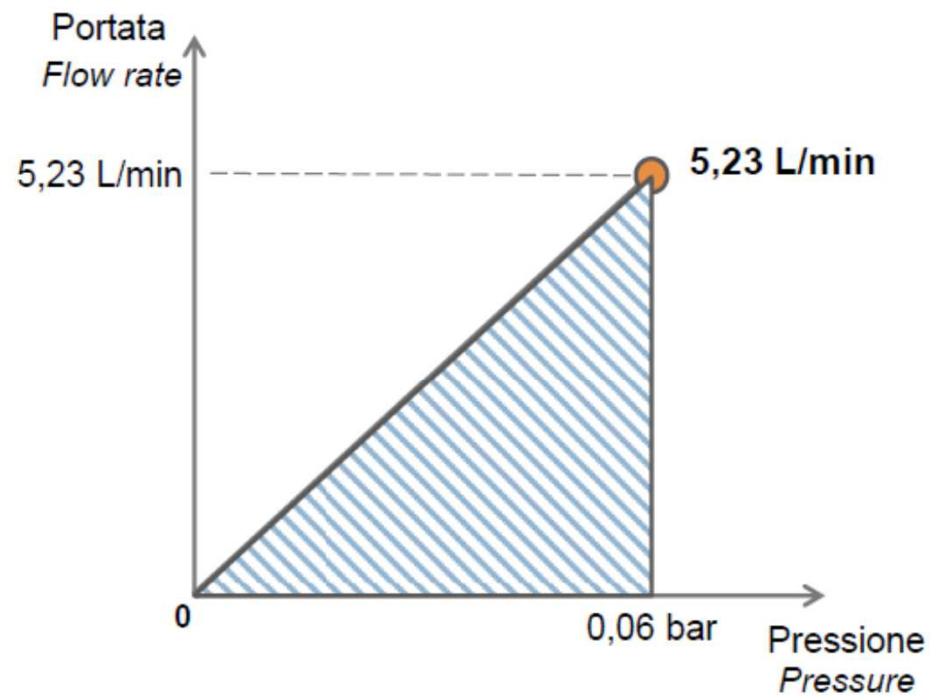

Applications

- Vending machines
- Ho.Re.Ca.
(Hotellerie.Restaurant.Café)
- OCS (Office Coffee Service)
- Food industry



RD Vent Series

100%
MADE IN ITALY

7

Vending Series Solenoids

Codice progress./ Progress code	Tensione Voltage	Frequenza Frequency	Potenza mantenim. Holding Power	Assorbim. (mA) in mantenimento / Holding Current	ED (funzionamento) (duty cycle)	Connessioni Connections		Controllo Control	
						Faston (F), Cavi (wires) Unipolari (C)	Cavi (wires) bipolari (in mm)	NC	NA* (NO)
1	24 V DC	=	14 W	600 mA	/	F, C	620, 2500	✓	
2	12 V DC	=	14 W	1100 mA	/	F, C	620, 2500	✓	

(*) I solenoidi NA non sono disponibili con cavi bipolari / NO solenoids are not available with bipolar wires

Legenda / Key:

NC: Normalmente Chiusa / Normally Closed

NA: Normalmente Aperta / Normally Open

NB: Bistabile / Latching

GW: Glow Wire

Faston: IP X0

Cavi / Wires: IP 55

Classe Isolamento / Insulation class: II

Classe Isolamento bobina / Coil insulation class: F

Tipo Faston / Faston type: 6,3 x 0,8 mm



NOTHING GREAT HAS EVER BEEN DONE WITHOUT PASSION

8

Grazie per l'attenzione



www.rpesrl.it